
CPX PRESSURE WASHER

CPX SERIES: COLD WATER SKID, DIESEL ENGINE







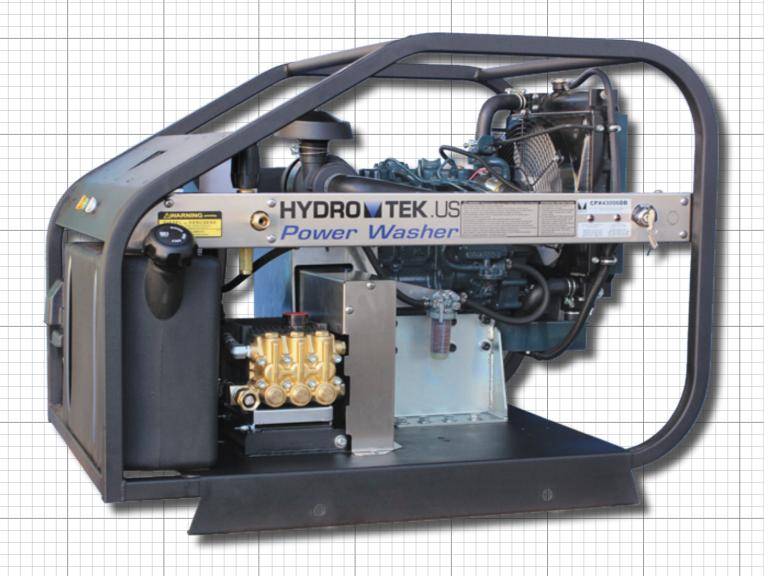

BUILT FOR THE EXTREME DUTY USER

THYDRO TEK

COLD PRESSURE WASHER

DIESEL POWERED



Extra Long Life:

Built with the same technology and industrial components that we put into our hot water diesel skids.

Rugged Pro-tect-it™ Frame:

An extra-large, rugged, powder-coated steel frame surrounds the entire machine protecting its vital components. Each frame has double wall steel engine mounts to absorb engine vibration for smooth performance. Includes mounting holes to hold multiple optional stainless hose reels to store both high pressure and garden hose. Flexible mounting options include: trailer, tank skid, stationary, or add a wheel kit for portability.

High Output Industrial Engines:

Heavy duty, multi cylinder diesel engines are water cooled and include oil filtration and electric key start. Panel mounted engine condition indicator lights to monitor your engine temperature & oil pressure. A side mount muffler prevents water ingress.

Panel Mounted Unloader:

The unloader is panel mounted away from the pump and engine eliminating heat failures and vibration. It is pressure activated for consistent and dependable operation.

Belt Drive Pump:

V-belt driven pump with low RPM drive runs cooler and quieter for continuous duty performance. These industrial triplex, ceramic plunger pumps outperform the competition in longevity.

■ EZ Align™ Belt System:


Tensioning system allows for easy belt adjustment with a single adjustment bolt. If you need to remove the pump for preventative maintenance, it is as simple as removing bolts, no need to reach underneath the washer.

Remote Fuel Tanks:

Large 8 gallon fuel tank is located away from the heat of the engine. Extra capacity tank extends running time, less wasted time spent on fill-ups.

More standard features:

- Stainless steel control panel and belt guard
- Nozzles with insulated quick couplers (screw on for CPX50005)
- Heavy-duty, 50' high pressure hose
- Heavy duty, insulated wand with trigger gun
- Twist coupler hose connection to easily remove gun/wand for storage or to add additional lengths of hose
- Snap top battery box fits full size group 24 battery
- High flow models are two-gun compatible. Simply add the twogun kit option to use with two operators to get your job done faster

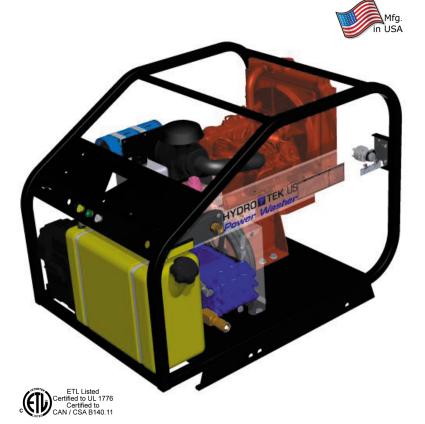

Specifications						
Model	PSI	GPM	CC	Engine		
CPX30004D	3000	4	599	Kubota Diesel	2 cylinder	
CPX30008D	3000	7.8	719	Kubota Diesel	3 cylinder	
CPX35006D	3500	5.5	599	Kubota Diesel	2 cylinder	
CPX43006DB	4300	5.5	719	Kubota Diesel	3 cylinder	
CPX50005D	5000	5	719	Kubota Diesel	3 cylinder	

Specifications may vary, consult factory for custom models

Dimensions: 421/2"Lx35"Wx311/2"H (38"W with optional wheel kit)

Optional Accessories:

8 gallon float tank, Hour meter, Emergency air choke shutoff, Stainless hose reels (150-250ft), Stainless drip pan, Custom color frame, Wheel kit, Trailer and Tank skid



Shown with Wheel kit and hose reel options

CLEANING EQUIPMENT MFG.

2353 Almond Ave. Redlands, CA 92374 phone 800.274.9376 or 1.909.799.9222 www.hydrotek.us fax 909.799.9888

DISTRIBUTED BY: